

Test Report issued under the responsibility of:



TEST REPORT IEC 60670-1 Boxes and enclosures for electrical accessories for household and similar fixed electrical installations Part 1: General requirements	
Report Number	2403B0697SHA-001
Date of issue	Apr.28, 2024
Total number of pages	35
Name of Testing Laboratory preparing the Report	Intertek Testing Services Shanghai
Applicant's name	MORDIO ELECTRICAL CO., LTD.
Address	Building 2, No.388, Binhai 13th Road, Longwan District, Wenzhou City, Zhejiang Province, China
Test specification:	
Standard	IEC 60670-1:2015
Test procedure	Testing
Non-standard test method	N/A
Test Report Form No.	IEC60670_1C
Test Report Form(s) Originator	IMQ S.p.A.
Master TRF	Dated 2017-02
Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	Frame	
Trade Mark :	REEMACO, FUJIMEN, MERALL, RAYBES, MAS GOLD, GOSIFE ELECTRIC, LGON LIFE GOES ON, BRASILUX, LECLERC, BJ, ARIES&SHINE, MORDIO, DANLIGHT, EGF, MELJAC, TOPELIGHTING	
Manufacturer :	Same as applicant	
Model/Type reference :	F300-038, F300-039, F300-040, F300-041, F300-042	
Ratings :	-	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	Testing Laboratory:	Intertek Testing Services Shanghai
Testing location/ address :		Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China
Tested by (name, function, signature) :		Michael Huang 
Approved by (name, function, signature) ...:		Justin Zhang  Digitally signed by justin.zhang
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address :		
Tested by (name, function, signature) :		
Approved by (name, function, signature) ...:		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address :		
Tested by (name + signature) :		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ...:		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address :		
Tested by (name, function, signature) :		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ...:		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment): Totally 35 pages (Including 3 pages for photos)	
Summary of testing: We conclude that the products described in this test report comply with the standard according to the testing results on the submitted samples.	
Tests performed (name of test and test clause): All clauses of IEC 60670-1:2015.	Testing location: Intertek Testing Services Shanghai Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China
Summary of compliance with National Differences (List of countries addressed): <input checked="" type="checkbox"/> The product fulfils the requirements of EN IEC 60670-1:2021+A11:2021.	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

MORDIO



F300-038

(F300-038 as an example)

Note: REEMACO, FUJIMEN, MERALL, RAYBES, MAS GOLD, GOSIFE ELECTRIC, LGON LIFE GOES ON, BRASILUX, LECLERC, BJ, ARIES&SHINE, DANLIGHT, EGF, MELJAC, TOPELIGHTING are alternative trademarks.

Test item particulars	
Classification of installation and use	Only accessories
Supply Connection	No supply
.....	
7.1 Nature of material	<input checked="" type="checkbox"/> 7.1.1 Insulating <input type="checkbox"/> 7.1.2 Metallic <input type="checkbox"/> 7.1.3 Composite <input type="checkbox"/> 7.1.4 Natural or synthetic rubber or mixture of both
7.2 type of installation	<input type="checkbox"/> 7.2.1 Flush, semi flush in solid walls, ceilings or floors <input type="checkbox"/> 7.2.1.1 not suitable for installation into concrete <input type="checkbox"/> 7.2.1.2 suitable for installation into concrete with a maximum temperature during the casting process of +60 °C <input type="checkbox"/> 7.2.1.3 suitable for installation into concrete with a maximum temperature during the casting process of +90 °C <input type="checkbox"/> 7.2.2 Flush, semi flush in hollow walls, hollow ceilings, hollow floors or furniture <input type="checkbox"/> 7.2.2.1 Class Ha <input type="checkbox"/> 7.2.2.2 Class Hb for walls <input checked="" type="checkbox"/> 7.2.2.3 Class Hb for ceilings <input type="checkbox"/> 7.2.3 Surface mounting on walls, ceilings, floors or furniture
7.3 type of inlets (outlets)	<input type="checkbox"/> 7.3.1 With inlets for sheathed cables for fixed installations <input type="checkbox"/> 7.3.2 With inlets for flexible cables <input type="checkbox"/> 7.3.3 With inlets for plain or corrugated conduits <input type="checkbox"/> 7.3.4 With inlets for threaded conduits <input type="checkbox"/> 7.3.5 With inlets for other types of conductors/cables or conduits <input type="checkbox"/> 7.3.6 With spouts (hub) <input type="checkbox"/> 7.3.7 Without inlets. Inlet openings will be made during installation
7.4 Clamping means	<input type="checkbox"/> 7.4.1 With cable retention <input type="checkbox"/> 7.4.2 With cable anchorage <input type="checkbox"/> 7.4.3 With clamping means for flexible conduit <input checked="" type="checkbox"/> 7.4.4 Without clamping means
7.5 Minimum temperatures during installation	<input checked="" type="checkbox"/> 7.5.1 -5 °C <input type="checkbox"/> 7.5.2 -15 °C <input type="checkbox"/> 7.5.3 -25 °C
7.6 degree of protection against access to hazardous parts and against harmful effects:	-
7.7 The degree of protection against harmful effects due to the ingress of water:	-
7.8 The degree of protection of the part mounted inside the hollow walls of the boxes classified according to 7.2.2.1	<input type="checkbox"/> 7.8.1 IP2X <input type="checkbox"/> 7.8.2 >IP2X <input type="checkbox"/> 7.8.3 Boxes intended to receive claws <input type="checkbox"/> 7.8.4 Boxes intended to receive other means

7.9 The provision for fixing accessories to boxes	<input type="checkbox"/>	7.9.1	boxes supplied with screws
	<input type="checkbox"/>	7.9.2	boxes intended to received screws
	<input type="checkbox"/>	7.9.3	boxes intended to received claws
	<input type="checkbox"/>	7.9.4	boxes intended to received other means
Possible test case verdicts:			
- test case does not apply to the test object		N/A	
- test object does meet the requirement		P (Pass)	
- test object does not meet the requirement		F (Fail)	
Testing			
Date of receipt of test item		Mar.13, 2024	
Date (s) of performance of tests		Mar.13, 2024 to Apr.25, 2024	
General remarks:			
<p>The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.</p> <p><i>This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.</i></p>			
Manufacturer's Declaration per sub-clause 4.2.5 of IEC60670-1:			
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided		<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable	
When differences exist; they shall be identified in the General product information section.			
Name and address of factory (ies)		Same as applicant	

General product information:

Plastic frame.

F300-038: 80 x 80 x 8,6mm.

F300-039: 80 x 152 x 8,6 mm.

F300-040: 80 x 222 x 8,6mm.

F300-041: 80 x 292 x 8,6mm.

F300-042: 80 x 362 x 8,6mm.

Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity
Frame	Wenzhou Huayang Plastic CO., Ltd.	-	PC	EN IEC 60670-1	Tested with appliance

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
8	MARKING		
8.1	Boxes and enclosures are marked with:		—
	a) name, trade mark or identification mark of the manufacturer or the responsible vendor..... :	Refer to page 2	P
	Enclosures are marked in addition with:		—
	b) IP code for degree of protection against access to hazardous part and against ingress of solid objects if higher than IP4X..... :	IP	N/A
	c) IP code against harmful ingress of water if higher than IPX2..... :	IP	N/A
	d) marking on cover of flush enclosures for rough surfaces and where IP is dependent on the surface (Fig. 5)..... :	IP ^^^	N/A
	IP code is marked on the outside of the enclosure so as to be easily discernible when the enclosure is mounted and wired as for normal use		N/A
	e) type reference, which may be a catalogue number..... :	Refer to page 2	P
	f) for box classified as 7.2.2.2 and 7.2.2.3 the minimum internal volume shall be marked on the inside of the enclosure		N/A
	Information marked on the boxes and enclosures or provided by the manufacturer on the smallest package unit or in the instructions of the manufacturer:		—
	g) maximum temperature during the building process if 90 ° for box classified as 7.2.1.3		N/A
	h) necessary information concerning the openings which can be made during installation for boxes and enclosures classified according to 7.3.7..... :		N/A
	i) minimum temperature during installation for boxes classified according to 7.5.2 and 7.5.3..... :		N/A
	j) symbol Ha for boxes classified according to 7.2.2.1, symbol Hb for boxes classified according to 7.2.2.2 and 7.2.2.3:		N/A
	Further information given in the manufacturer's catalogue or in an instruction sheet..... :		N/A
	Higher degree of protection achieved by the use of special parts: an instruction sheet is provided and it indicates the higher degree of protection		N/A
8.2	Marking is durable and easily legible		P
	Rubbing test 15 s with water and 15 s with petroleum spirit		P
	After the test: marking still legible		P

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
9	DIMENSIONS		
	Boxes and enclosures comply with the appropriate standard sheets, if any		N/A

10	PROTECTION AGAINST ELECTRIC SHOCK		
	In boxes and enclosures assembled, equipped and installed as for normal use in accordance with the manufacturer's instructions: live parts are not accessible		N/A
	Test probe 11 of IEC 61032 applied for 1 min with a force of 20 N do not penetrate in the internal volume of the enclosure, as show in Figure 2, which are accessible after installation		N/A
	Additional test at (35 ± 2) °C with probe 11 of IEC 61032 on enclosures according to 7.1.1 and 7.1.3 and 7.1.4 with parts of thermoplastic or electrometric material applied to:		N/A
	- all places, except membranes or the like, where yielding of insulating material could impair the safety, with a force of 75 N		N/A

11	PROVISION FOR EARTHING		
11.1	Boxes and enclosures with exposed conductive parts		N/A
	- provided with an earthing means of low resistance	No exposed conductive part	N/A
	- have provision for the fitting of such an earthing means		N/A
	Earthing means or provision for the fitting are located so that:		
	- the means is readily accessible, and		N/A
	- the removal of an accessory, does not disturb the continuity of the earthing circuit, and		N/A
	- the means is not part of a removable cover		N/A
	Exposed conductive parts of covers or cover-plates are connected through a low resistance connection to the earthing means		N/A
	Resistance $\leq 0,05 \Omega (\Omega)$:		N/A
	the earthing means or the provision for the fitting of such an earthing means shall be located so that:		N/A
	the means is readily accessible through the open face of the box		N/A
	the removal of an accessory mounted in the box does not disturb the continuity of the earthing circuit		N/A
	the means is not part of a removable cover, back, or side of the box		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
11.2	Boxes and enclosures of insulating material classified according to 7.2.2.2 and 7.2.2.3		N/A
	Provided with a minimum of one earthing strap with one screw terminal for earthing purposes with a connecting capacity $\geq 4 \text{ mm}^2$		N/A
	Design of earthing strap according to Figure 4		N/A
	Earthing strap is securely fastened to the box or enclosure		N/A
	Compliance is checked by the test in 16.3.2		N/A
11.3	Boxes and enclosures with removable sides according to 7.1.2		N/A
	Constructed so that the electrical bond between separable parts includes at least one threaded screw connection		N/A
11.4	Earthing terminal threads		N/A
	Threads of earthing terminal are not stripped		N/A
	Torque of Table 4 applied on screw (Nm)..... :		N/A
	Greater values may be used if so stated by the manufacturer		N/A
	During the test: no damage such as impairing the further		N/A

12	CONSTRUCTION		
12.1	General		P
	Boxes and enclosures are constructed without sharp edges		P
	The inner and outer surfaces of a box or cover have the following characteristics:		—
	- not subject to peeling, scaling or flaking, and		P
	- smooth and free from blisters, crack and other defects		P
12.2	Lids, covers or cover-plates or part of them		N/A
12.2.1	Lids, covers or cover-plates or parts of them, such as protective membranes, which are intended to ensure protection against electric shock, are held in place effectively		N/A
	the fixing means of cover or cover plate be captive		N/A
12.2.2	Screw-type fixing		N/A
	Box or enclosure intended to accept a lid, cover or cover plate by means of screw fixing is provided with means to accommodate the intended screws		N/A
	Lids, covers or cover-plates whose fixing is of the screw-type		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
12.2.3	Non-screw-type fixing operable without the use of a tool or a key		N/A
12.2.3.1	a box or enclosure intended to accept a lid, cover, or cover plate with non-screw-type fixing operable without the use of a tool or a key shall be provided with means to fix the lid, cover or cover plate		N/A
	Lids, covers or cover-plates whose removable is obtained by applying a force according to the requirements in table 2 in a direction perpendicular to the mounting surface when their removal may give access with test probe B of IEC 61032		N/A
	- to live parts		N/A
	- to non-earthed conductive parts separated from live parts by basic insulation		N/A
	- only to insulating parts, earthed conductive parts, conductive parts separated from live parts by double or reinforced insulation, or live parts of SELV circuits according to IEC 61140 having a voltage ≤ 25 V a.c. or 60 V d.c.		N/A
12.2.3.2	Verification of the non-removal of the lids, covers or cover-plates		N/A
	Force according to Table 2 applied for 1 min in a direction perpendicular to the mounting surface .. :	10 N / 20 N / 40 N / 80 N	N/A
	Lids, covers or cover-plates not come off		N/A
	For flush-mounting boxes or enclosures, test repeated on new specimens with a sheet of hard material, $(1 \pm 0,1)$ mm thick, fitted on the wall around the supporting frame according to Figure 5		N/A
	Lids, covers or cover-plates not come off		N/A
12.2.3.3	Verification of the removal of the lids, covers or cover-plates		N/A
	Force not exceeding 120 N applied 10 times in a direction perpendicular to the mounting/supporting surface: lids, covers or cover-plates come off		N/A
	After the test: no damage		N/A
	For flush-mounting boxes or enclosures, test repeated on new specimens with a sheet of hard material, $(1 \pm 0,1)$ mm thick, fitted on the wall around the supporting frame according to Figure 5		N/A
	Force not exceeding 120 N applied 10 times in a direction perpendicular to the mounting/supporting surface: lids, covers or cover-plates come off		N/A
	Lids, covers or cover-plates come off		N/A
	After the test: no damage		N/A
12.2.3.4	Verification of the outline of lids, covers and cover-plates		N/A
	Gauge of Figure 6 applied according to Figure 7 for verification of the outline of lids, covers or cover-plates: distances between face C of gauge and outline of side under test, not decrease	complying / not complying	
12.2.3.5	Verification of grooves, holes and reverse tapers		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Gauge of Figure 9 applied according to Figure 10 with a force of (1 ± 0,2) N: gauge not enter more than 1 mm	complying / not complying	—
12.2.4	Non screw-type fixing operable with the use of a tool or key		N/A
	Lids, covers or cover-plates whose fixing is not dependent on screws and whose removal is obtained by using a tool and/or a key according to the manufacturer's instructions: tests according to 12.2.3		N/A
	Force not exceeding 120 N applied in a direction perpendicular to the mounting/supporting surface: lids, covers or cover-plates need not come off		N/A
	For flush-mounting boxes or enclosures, test repeated on new specimens with a sheet of hard material, (1 ± 0,1) mm thick, fitted on the wall around the supporting frame according to Figure 5		N/A
	Lids, covers or cover-plates not come off		N/A
12.3	Drain holes		N/A
	Surface and semi-flush mounting enclosures having IPX1 to IPX6 allow the opening of a drain hole ≥ 5 mm in diameter (mm Ø) or 20 mm ² in area (mm ²) with a width or length ≥ 3mm (mm)		N/A
	Drain holes: effective		N/A
12.4	Mounting of enclosures		N/A
	Enclosures have provisions for their suitable attachment according to the method of installation		N/A
	Conductive parts of fixing means inside the box or enclosure are surrounded by insulation which projects above the top of the fixing means by an amount of ≥ 10 % of the maximum width of the cavity for the fixing means (mm)	Required: Measured:	N/A
12.5	Boxes and enclosures with inlets for flexible cables		N/A
	Inlets (outlets) provided in boxes and enclosures classified according to 7.3.2, the flexible cables can be easily introduced, and		N/A
	- no damage the flexible cable where it enter, or		N/A
	- enclosure impairing its further use		N/A
12.6	Boxes and enclosures with inlets for applications other than flexible cables		N/A
	Inlet openings classified according to 7.3 other than 7.3.2, if any, allow the introduction of:		—
	- a conduit or a suitable fitting, and/or		N/A
	- the protective covering of the cable		N/A
	Inlet opening for conduit entries:		—

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- capable of accepting either conduits of sizes, or a combination of sizes, according to IEC 60423 and/or IEC 60981		N/A
	- same requirement in at least two inlet openings if there are more than one		N/A
12.7	Boxes and enclosures with a cable anchorage(s)		N/A
	In boxes and enclosures classified according to 7.4.2 the connection of the conductors of the flexible cable are relieved from strain		N/A
	Clear how relief from strain and prevention of twisting is intended to be effected		N/A
	Cable anchorages are:		—
	- suitable for the different types of flexible cable		N/A
	- at least one part of it is integral with, or permanently fixed to, one of the component parts of the box		N/A
	- of insulating material or provided with an insulating lining fixed to the metal parts		N/A
	Test of effectiveness of the cable anchorage:		—
	- external dimensions of flexible cable (mm)		—
	- clamping screws tightened with a torque equal to 2/3 of that specified in Table 4 (Nm)		—
	- glands tightened with a torque equal to that specified in Table 5		—
	It is not possible to push the flexible cable into the specimen by more than 1 mm with a force specified in Table 3 (N).....		N/A
	Pull force as specified in Table 3 applied 50 times for 1 s (N).....		—
	Torque as specified in Table 3 applied for (15 ± 1) s (Nm)		—
	After the test: displacement ≤ 2 mm (mm)		N/A
	Cable anchorage: no damage		N/A
12.8	Boxes and enclosures with cable retention means		N/A
	Cable retention means of boxes and enclosures classified according to 7.4.1 retain the cable in place		N/A
	Boxes and enclosures according to 7.5.2 or 7.5.3, tested at (-15 ± 2) °C and (-25 ± 2) °C respectively		N/A
	Test with cables as declared by the manufacturer, fitted according to the manufacturer's instructions and loaded with an axial force of (20 ± 1) N applied for 1 min:		—

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Type of cable/maximum nominal cross-sectional area (mm ²)		—
	After the test: displacement ≤ 3 mm (mm)		N/A
	Type of cable/minimum nominal cross-sectional area (mm ²)		—
	After the test: displacement ≤ 3 mm (mm)		N/A
12.9	Knock-out inlets (outlets) intended to be removed by mechanical impact		N/A
12.9.1	General		N/A
	It is possible to remove knock-out by mechanical impact without damaging the box		N/A
	Chips or burrs are not accepted in knock-out for cables		N/A
	Chips and burrs are disregarded in knock-out for conduits and/or for use with a grommet or a membrane		N/A
	In order to close an open knock-out in a box or an enclosure according 7.1.2 a blanking-plug used without a locknut:		—
	- not become dislodged, and		N/A
	- its effectiveness not be impaired, and		N/A
	- it fulfil all requirements for knock-outs		N/A
12.9.2	Knock-out retention		N/A
	Boxes and enclosures having knock-outs, accessible after installation by means of a 6 mm diameter mandrel with a flat end that:		—
	- not provide access to live parts, a force of (30 ± 1) N applied for (15 ± 1)s		N/A
	- provide direct access to live parts, a force of (40 ± 1) N applied for (60 ± 1) s		N/A
	Box with multi-stage knock-outs, the force applied to the smallest		N/A
	During the test: knock-out remains in place		N/A
	Degree of protection unchanged 1 h after the test		N/A
12.9.3	Knock-out removal		N/A
	Removal test of knock-outs with a tool as stated by the manufacturer, without conditioning:		—
	During the test: no displacement of a larger stage of multi-stage knock-outs when a smaller stage is removed		N/A
	After the test: no sharp edges, box and enclosure is not damaged		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Removal test of knock-outs with a tool as stated by the manufacturer, immediately following a conditioning at the minimum temperature specified according to 7.5 for 5 h ± 10 min (boxes and enclosures according to 7.1.1 or 7.1.3)		N/A
	Test temperature (°C)..... :		—
	During the test: no displacement of a larger stage of multi-stage knock-outs when a smaller stage is removed		N/A
	After the test: no sharp edges, box and enclosure is not damaged		N/A
12.9.4	Flat surfaces surrounding knock-outs		N/A
	Knock-outs intended for the use of grommets, glands or fittings shall be located in flat surfaces		N/A
	projections in the flat surface shall be prohibited		N/A
12.10	Screw fixings		N/A
	Fixing means effected by screws withstand mechanical stresses		N/A
	Screw or other fixing means made from insulating material without standardized thread are tested according to the manufacturer's instruction		N/A
	Thread-forming or thread-cutting screws used only if supplied together with one of the pieces with which they are intended to be inserted		N/A
	Verification of the mechanical strength of screws	See appended table 12.10	N/A
12.11	Fixing of boxes and enclosures classified according to 7.2.1		N/A
	Fixing means provided for flush type boxes and enclosures other than for hollow walls..... :		N/A
	Screws not supplied with box or enclosures can be provided according to the manufacturer's instruction		N/A
	Screws, additional mechanical supports or design features, are considered adequate fixing means		N/A
	Boxes and enclosures not fulfilling at least one of the above requirement and having an internal volume less than 400 cm ³ tested as follow:		—
	- the block is filled by the following material..... :		N/A
	- assembly is kept at ambient temperature for 10 (+1/0) days		—
	- auxiliary device described in Figure 13 is mounted on the specimen and the screw are tightened with a torque equal to 2/3 of that specified in table 4..... :		—
	After the test, displacement of the specimen from the mounting block ≤ 0,5 mm:		N/A
12.12	Boxes and enclosures classified according to 7.2.2.1		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Boxes and enclosures for hollow walls or the like classified according to 7.2.2.1 provide suitable means for fixing the box or the enclosure to hollow walls, hollow ceilings, hollow floor or furniture		N/A
	Fixing means not rely the on the cable management system		N/A
	Box or enclosure mounted in a test wall:		—
	- according to the manufacturer's instructions		—
	- sheet of plywood 500 mm wide x 500 mm high, (10 ± 1) mm thick		—
	a) Pull and torque test: lever loaded with a torque of 3 Nm (Figure 15a) and a force of 100 N (Figure 15b) for 1 min		—
	After this tests: no damage, displacement of the lever no more than 2 ° (°)		N/A
	b) Displacement test: lever loaded with a torque of 3 Nm (Figure 15c) for 1 min		—
	After the test: edge of the box not displaced by more than 1 mm (mm)		N/A
12.13	boxes and enclosures classified according to 7.2.2.2 and 7.2.2.3		N/A
	boxes and enclosures for hollow walls or the like classified according to 7.2.2.2 and 7.2.2.3 shall have suitable means for fixing the box to hollow walls and hollow ceiling		N/A
	the fixing means shall not rely on cable management system		N/A
	the compliances is checked by the tests in 12.13.2, 12.13.3, 12.13.4 or 12.13.6 as applicable		N/A
12.13.2	Boxes intended for mounting to a wood structural member of a wall		N/A
	Box mounted to a (45 x 90) mm wood structural member in a vertical position; force of 225 N applied for 5 min		—
	After the test: no pulling out of the nails or screws		N/A
	No movement of the face of the box of more than 3 mm (mm)		N/A
12.13.3	Boxes intended for mounting to a wood structural member of a ceiling		N/A
	Box mounted to a (35 x 190) mm wood structural member in vertical position; force of 225 N applied for 1 min		—
	During the test: deflection of the face of the box does not exceed 6 mm (mm)		N/A
12.13.4	Boxes intended for mounting to a steel-stud structural member of a wall		N/A
	Box mounted to a steel-stud structural member according to Figure 16; force of 180 N applied for 5 min in the direction to push the box into the wall opening		—

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	During the test with a force of 180 N applied for 5 min in the direction to push the box into the wall opening: deflection of the box does not exceed 2 mm (mm)		N/A
	During the test with a force of 180 N applied for 5 min in the direction to pull the box out of the wall opening: deflection of the box does not exceed 2 mm (mm)		N/A
12.13.5	Internal volume of boxes and enclosures classified according to 7.2.2.2 and 7.2.2.3		N/A
	Verification of the declared internal volume for boxes, enclosures, raised covers and box extensions		N/A
	Verification of the volume of each partitioned section for box or enclosure with a partition		N/A
	Checked by the test of clause 12.16		N/A
12.13.6	Boxes intended for mounting in a finished structure		N/A
	Supporting means not crack or break nor the face of the box be permanently displaced more than 3,2 mm from the plane of the face of the test surface when measured 1 minute after the test load is removed		N/A
	Six boxes intended for use in walls or eight boxes intended for use in ceilings are installed in prescribed plywood sheet or in a finished surface in accordance with the manufacturer's instructions		—
	Screws for the box supporting means are tightened as follow:		—
	- in accordance with the manufacturer's instructions or		N/A
	- in accordance with column 4 of Table 4.		N/A
	Following installation, a force of 222 N is applied for 5 min		N/A
12.14	Cable gland entry		N/A
	Torque test: glands provided with a metal rod tightened and loosened 10 times with a torque specified in Table 5 for 1 min ± 5 s		—
	- diameter of test rod (mm)		—
	- type of material (metal / insulating).....		—
	- torque (Nm)		—
	After the test: no damage		N/A
12.15	Boxes and enclosures with inlets (outlets) or spouts (hubs) for conduits		N/A
12.15.1	Boxes and enclosures classified according to 7.3.4 and conical spouts as in 7.3.6 withstand the tests of 12.15.2, 12.15.3 and 12.15.4		N/A
	Boxes and enclosures classified according to 7.4.3 withstand the tests of 12.15.2 and 12.15.3		N/A
12.15.2	Enclosures with inlet spout for conduits: a minimum size piece of conduit pressed for 1 min ± 5 s with a force of (100 ± 2) N		—

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	During the test: inlet spout prevents further entry of the conduit into the box		N/A
12.15.3	Pull-out test after the test according to 12.15.2: conduit with the minimum size corresponding to the insert opening loaded for 1 min with a tensile force of (20 ± 2) N		—
	During the test: conduit not come loose from the inlet spout of the enclosure		N/A
12.15.4	Resistance to bending strain of an inlet spout: piece of conduit inserted into the inlet spout with a compressible force of (100 ± 2) N and loaded with a bending moment of 3 Nm for 1 min in six different directions with an interval of $(60 \pm 2)^\circ$		—
	During the test: inlet spout not come loose or damaged and conduit stays within the inlet spout		N/A
12.16	Internal volume of boxes and enclosures		N/A
	Declared internal volume of the box or enclosure and each partitioned section of a box or enclosure, raised cover and box extension is measured		N/A
	The volume of a side pocket provided to increase the volume of a box or enclosure is calculated using a depth-of-pocket not more than the smallest dimension of the opening into that side pocket		N/A
	Difference in the volume of water in the measuring cylinder measured before and after the filling of the box, enclosure or raised cover indicates the volume of the box		N/A

13	RESISTANCE TO AGEING, PROTECTION AGAINST INGRESS OF SOLID OBJECTS AND AGAINST HARMFUL INGRESS OF WATER		
13.1	Resistance to ageing		P
13.1.1	Specimens of insulating and composite boxes and enclosures, glands, grommets and replaceable membranes placed in a heating cabinet at $(70 \pm 2)^\circ\text{C}$ for $(168 + 4)$ h and then kept at room temperature for $(96 + 4)$ h		P
	Glands tightened with a torque equal to 2/3 of the torque applied during the test of 12.14 (Nm)	-	—
	Greater torque value stated by the manufacturer, if any (Nm)	-	—
	After the test: no harmful deformation or similar damage		P
13.1.2	Grommets, blanking-plug and entry membranes in inlet openings and protecting membranes are reliably fixed and are not displaced by the mechanical and thermal stresses occurring in normal use		N/A
	Specimens that have been subjected to the treatment specified in 13.1.1 placed in a heating cabinet at $(40 \pm 2)^\circ\text{C}$ for $2\text{ h} \pm 15\text{ min}$		

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Immediately after this period the tip of test probe 11 of IEC 61032 is applied for (5 ± 1) s with a force of $(30 - 2)$ N. During the tests: grommets, blanking-plug and/or membranes not deformed to such an extent that live parts of any included accessory become accessible		N/A
	Grommets, blanking-plug and/or membranes likely to be subjected to an axial pull: axial pull of $(30 - 2)$ N applied for (5 ± 1) s. During the tests: grommets, blanking-plug and/or membranes not deformed to such an extent that live parts of any included accessory become accessible		N/A
	Test repeated on same enclosures fitted with grommets, blanking-plug and/or membranes not subjected to any treatment		N/A
	After the test: no harmful deformation, cracks or similar damage		N/A
13.1.3	Grommets, blanking-plug and entry membranes in inlet openings of boxes and enclosures classified according to 7.5.2 and 7.5.3: introduction of the cables and conduit permitted when the ambient temperature is low		N/A
	Test on enclosures fitted with grommets, blanking-plug and/or membranes not subjected to any ageing treatment kept for 2 h in a refrigerator		—
	Test temperature (°C)		—
	Immediately after conditioning: it is possible to pierce any blind grommets, blanking-plug and entry membranes and to introduce cables and conduit of the maximum diameter intended		N/A
	After the test: no harmful deformation, cracks or similar damage		N/A
13.2	Protection against the ingress of solid objects		N/A
	Enclosures provide a degree of protection against the ingress of solid objects in accordance with the declared IP code		N/A
	for box and enclosures classified according to 7.2.2.1 the above requirements applies also to the part mounted inside the hollow wall according to classification 7.8		N/A
	compliance is checked by the appropriate test of IEC 60529 under the following tests conditions		N/A
	Enclosures mounted as in normal use according to the manufacturer's instructions		N/A
	box and enclosures classified according to 7.2.2.1, the test on the part mounted inside the wall is made on a box mounted so that the rear part is accessible for the test		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	unless otherwise stated herein, where the enclosure has drain holes, at least one open drain hole shall be in the lowest position		N/A
	- type of cable, smallest cross-sectional area (mm ²) :		—
	- type of cable, largest cross-sectional area (mm ²):		—
	Enclosures mounted as in normal use with screwed glands or grommets fitted with conduits as declared by the manufacturer:		N/A
	- smallest diameter or dimensions (mm) :		—
	- largest diameter or dimensions (mm) :		—
	Fixing screws of the cover or cover-plate tightened with a torque equal to 2/3 of the value of Table 4 used for the test of 12.10 (Nm)..... :		—
	Greater torque value stated by the manufacturer, if the relevant information is provided (Nm) :		—
	- IP5X: test performed as specified in IEC 60529 category 2 with the drain holes, if any, not opened		N/A
	- IP≤4X: test probe does not pass through any opening other than drain holes		N/A
	- IP≤4X: test probe applied on drain holes does not touch live parts within the enclosure		N/A
	- IP5X: dust does not cover the whole inner surface		N/A
	- IP6X: there is no dust inside the box or enclosure		N/A
13.3	Protection against harmful ingress of water		N/A
13.3.1	Enclosures with IP>X0 provide a degree of protection against harmful ingress of water in accordance with the declared IP code :		N/A
	Enclosure dimensions: reference surface S (m ²) / perimeter (m) :		—
	Appropriate test performed on surface, flush or semi-flush enclosures as specified in IEC 60529 under the following conditions:		
	- dimension S ≤ 0,04 m ² or perimeter ≤ 0,8 m according to 13.3.2 and 13.3.3		N/A
	- dimension S > 0,04 m ² and perimeter > 0,8 m according to 13.3.2 and 13.3.4		N/A
	Enclosures with screwed glands or grommets fitted with cables as declared by the manufacturer:		N/A
	- type of cable, smallest cross-sectional area (mm ²) :		—
	- type of cable, largest cross-sectional area (mm ²):		—
	Enclosures with screwed glands or grommets fitted with conduits as declared by the manufacturer:		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- smallest diameter or dimensions (mm)		—
	- largest diameter or dimensions (mm)		—
	Fixing screws of the cover or cover-plate tightened with a torque equal to 2/3 of the value of Table 4 used for the test of 12.10 (Nm)		—
13.3.2	Surface-mounting enclosures mounted as for normal use		N/A
	Flush type and semi-flush type enclosures fixed in a test wall:		
	- according to the manufacturer's instructions		N/A
	- according to Figure 19		N/A
	Enclosures fitted with cables having conductors of the largest and smallest cross-sectional area as declared by the manufacturer		—
	IPX3 and IPX4 enclosures: use of oscillating tube (Figure 4) or spray nozzle according to IEC 60529 (Figure 5)		—
13.3.3	Immediately after the test no more than 0,2 ml x S (cm ²) water in the enclosure (ml).....		N/A
	Specimens withstand an electric strength test specified in 14.3 started within 5 min of the completion of IP test		N/A
13.3.4	Immediately after the test: indicator paper still dry		N/A

14	INSULATION RESISTANCE AND ELECTRIC STRENGTH		
14.1	Insulation resistance and electric strength of enclosures classified according to 7.1.1, 7.1.3 and 7.1.4 is adequate		P
	Specimens placed in a humidity cabinet containing air with relative humidity between 91 % and 95 % and air temperature between 20 °C and 30 °C for:		
	- 2 days (48 h) for enclosures classified IPX0		P
	- 7 days (168 h) for enclosures classified IP>X0		N/A
	After this treatment: no damage		P
14.2	Insulation resistance measured 1 min after application of 500 V d.c.	See appended table 14.2	N/A
14.3	Electric strength: a.c. test voltage applied for 1 min	See appended table 14.3	N/A

15	MECHANICAL STRENGTH		
15.1	Boxes and enclosures have adequate mechanical strength		P

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Non-metallic boxes and enclosures for use in cast concrete classified according to 7.2.1.2 or 7.2.1.3: by the test of 15.2		N/A
	Non-metallic boxes and enclosures for use in cast concrete and able to withstand 90°C during the process classified according to 7.2.1.3, by the test of 15.3		N/A
	for non-metallic boxes and enclosures classified according to:		
	a) 7.2.3, by the test of 15.4		N/A
	b) 7.2.1.1 or 7.2.2 and also classified according to :7.5.2 or 7.5.3, by the test of 15.4		N/A
	for non-metallic boxes and enclosures, the parts which are intended to be accessible after completion of the building process, by the test of 15.4		P
	for boxes and enclosures classified according 7.1.4, by the test of 15.5		N/A
	when an enclosure is too large to fit the test apparatus shown in annex D using the spring hammer (of IEC 600068-2-75:1997)		N/A
15.2	Impact test at low temperature		N/A
	- (-5 ± 2) °C for boxes and enclosures classified according to 7.5.1		N/A
	- (-15 ± 2) °C for boxes and enclosures classified according to 7.5.2		N/A
	- (-25 ± 2) °C for boxes and enclosures classified according to 7.5.3		N/A
	Specimens subjected to 5 blows with a mass of 1 kg falling from a height of 100 mm: no damage		N/A
	after the test no damage		N/A
15.3	Compression test		N/A
15.3.1	Boxes and enclosures are placed in a heating cabinet at (90 ± 5) °C for (60 + 15) min		
	After cool down to ambient temperature: neither deformation nor damage		N/A
	Boxes and enclosures then placed between two flat hardwood plates and loaded with a force of (500 ± 5) N for 1 min \pm 5 s		N/A
	No deformation or damage		N/A
15.4	Impact test for boxes and enclosures		P
	Specimens subjected to blows by means of an impact test apparatus as described in IEC 60068-2-75 (test EHA) with equivalent mass of 250 g	See appended table 15.4	P

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Boxes classified according to 7.5.2 and 7.5.3 performed at the following temperature:		
	- (-15 ± 2) °C for boxes classified according to 7.5.2		N/A
	- (-25 ± 2) °C for boxes classified according to 7.5.2		N/A
	After the test: no damage		P
15.5	Compression test for enclosures made of nature or synthetic rubber or a mixture of both		N/A
	box and enclosure classified according to 7.1.4 shall withstand a load which can be expected in normal use		N/A
	a) Cover loaded with a force of 50N for 1min, deflecting ≤ 3mm		N/A
	b) pressure of 50N/cm ² for 1 min.		N/A
	after the test, no damage and compliance with this standard		N/A
16	RESISTANCE TO HEAT		
16.1	Part of insulating material necessary to retain current-carrying parts		N/A
	Parts of insulating material necessary to retain current-carrying parts and/or parts of the earthing circuit in position: ball-pressure test according to IEC 60695-10-2 at (125 ± 2) °C for (60 +5) min	See appended table 16.1-16.2	N/A
16.2	Part of insulating material not necessary to retain current-carrying parts		P
	Parts of insulating material not necessary to retain current-carrying parts and/or parts of the earthing circuit in position, even though in contact with them, and parts necessary to retain earthing terminals in position: ball-pressure test according to 16.1 but at (70 ± 2) °C	See appended table 16.1-16.2	P
	Parts of insulating material of flush-mounted enclosures classified according to 7.6.2: ball-pressure test according to 16.1 but at (90 ± 2) °C	See appended table 16.1-16.2	N/A
16.3	Boxes and enclosures of insulating materials classified according to 7.2.2.2 or 7.2.2.3		N/A
16.3.1	Mechanical strength		N/A
	Boxes and enclosures of insulating materials classified according to 7.2.2.2 or 7.2.2.3 :adequate mechanical strength at high temperature		N/A
	Rigid crossbar (Figure 25) secured across the face of the box with screws tightened with a torque according to Table 4 (Nm).....		—
	Total force of 180 N applied for 24 h to the face of the box at:		
	- (80 ± 2) °C for boxes and enclosures classified according to 7.2.2.2		N/A

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- (105 ± 2) °C for boxes and enclosures classified according to 7.2.2.3		N/A
	After the assembly has been cooled down to ambient temperature:		
	- screws not have pulled out more than 6,3 mm (mm)..... :		N/A
	- torque used for removal the screws not exceeding 2,3 Nm (Nm)..... :		N/A
16.3.2	Part of insulating material necessary to retain current-carrying parts of earthing circuit		N/A
	Parts of insulating material necessary to retain earthing strap subjected to a pull test of 45 N for 5 min as follow:		
	- one specimen tested in the condition as delivered and		N/A
	- one specimen tested after conditioning at 90 °C for 168 h		N/A
	Thread of the earthing terminal not stripped when applying a torque according to Table 4 (Nm)		N/A
	After each test: the earthing strap not become detached from the specimen		N/A
17	CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH SEALING COMPOUND		
	Void		—
18	RESISTANCE OF INSULATING MATERIAL TO ABNORMAL HEAT AND FIRE		
	Glow-wire test according to Clauses 4 to 10 if IEC 60695-2-11	See appended table 18	P
19	RESISTANCE TO TRACKING		
	Parts of insulating material retaining live parts in position of boxes and enclosures having IP>X0: PTI 175, 50 drops, solution A of IEC 60112	See appended table 19	N/A
20	RESISTANCE TO CORROSION		
	Test made after having removed all grease by immersion in a degreasing agent for (10 ± 1) min, (10 ± 1) min in a 10 % solution of ammonium chloride, (10 ± 1) min in a box containing air saturated with moisture and (10 ± 1) min at (100 ± 5) °C		N/A
	No signs of rust		N/A
21	ELECTROMAGNETIC COMPATIBILITY (EMC)		
	No tests necessary		—

IEC 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict

12.10	TABLE: mechanical strength of screws				N/A
threaded part identification (e.g. fixing means for cover)	diameter of screw thread (mm)	column number – Table 4 (I, II, III or IV)	applied torque – Table 4 (Nm)	times (5/10)	no damage
supplementary information:					

14.2	TABLE: insulation resistance			N/A
test voltage applied between:		measured (M Ω)	required (M Ω)	
supplementary information:				

14.3	TABLE: electric strength			N/A
rated insulation voltage (V)				—
test voltage applied between:		test voltage (V)	flashover / breakdown (Yes/No)	
supplementary information:				

15.4	TABLE: impact test			P
part of enclosure tested per Table 7 (A, B, C, D, E, F, G)	Total number of blows per part – Figure 10	height of fall (mm)	comments	
A	5	80	No damage	
E	4	120	No damage	
supplementary information:				

16.1-16.2	TABLE: ball pressure test of insulating materials			P
allowed impression diameter (mm)		≤ 2 mm		—
part under test		test temperature (°C)	impression diameter (mm)	
Frame		70	1,1	
supplementary information:				

18	TABLE: glow-wire test			P
----	-----------------------	--	--	---

IEC 60670-1						
Clause	Requirement + Test			Result - Remark	Verdict	
	part under test	material designation	test temperature (°C)	visible flame and sustained glowing (Y/N)	flames and glowing extinction time	ignition of the tissue paper (Y/N)
	Frame	PC	650	N	-	N
supplementary information:						

19	TABLE: resistance to tracking			N/A
	part under test	material designation	test voltage (V)	flashover / breakdown (Yes/No)
			175	
supplementary information:				

EN 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
IEC60670_1C ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT			
IEC 60670-1			
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES			
Boxes and enclosures for electrical accessories for household and similar fixed electrical installations			
Part 1: General requirements			
Differences according to: EN IEC 60670-1:2021/A11:2021			
TRF template used: IECEE OD-2020-F2:2020, Ed. 1.1			
Attachment Form No.: EU_GD_IEC60670_1C			
Attachment Originator: IMQ S.p.A.			
Master Attachment: 2022-04-08			
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		P
7	CLASSIFICATION		P
	Delete classifications 7.2.2.2 and 7.2.2.3 from Table 1.		P
8	MARKING		N/A
8.1	Replace f) by:		N/A
	f) void		N/A
	Replace j) by:		N/A
	j) the letter Ha or information for boxes and enclosures classified according to 7.2.2.1”		N/A
	Replace the penultimate paragraph by:		N/A
	“Unless self-evident, further information for the correct installation and use of the box or enclosure shall be given in the manufacturer’s instructions which need not be provided with the product. E.g. information on dimensions to ensure compatibility with the accessories to be accommodated.”		N/A
9	DIMENSIONS		N/A
	Replace the first sentence by: “Boxes and enclosures shall comply with the appropriate standard sheets if any, see Annexes ZB and ZC for the countries concerned.”		N/A
11	PROVISION FOR EARTHING		N/A

EN 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
IEC60670_1C ATTACHMENT			
11.2	Replace 11.2 by: "11.2 Void" Delete Figures 3, 4, and replace the relevant titles with "deleted text".		N/A
12	CONSTRUCTION		N/A
12.4	add the following after the 3rd paragraph:		N/A
	"In case there is a cavity, the head of the screw can be protected by an additional cap of insulating material. In this case the manufacturers instruction shall give information concerning the cap to be used		N/A
	In case there is no cavity the head of the screw shall be protected with a cap of insulating material and in this case, the cap shall be delivered with the box.		N/A
	The cap shall stay in position during normal use.		N/A
	<i>Compliance is checked by the following test:</i> The caps are fixed to the boxes according to the manufacturer's instructions and subjected to the ageing test of 13.1.		N/A
	<i>After 1 h, the cap not come detached</i>		N/A
12.6	delete the words "and/or IEC 60981" in the second paragraph.		N/A
12.9.4	Replace last sentence by:		N/A
	"Compliance is checked by inspection."		N/A
12.13	Replace "12.13 Void"		N/A
	Delete Figure 16 and replace the relevant titles by "deleted text".		N/A
12.15.1	delete the words "or IEC 60981" in the fourth paragraph.		N/A
13	RESISTANCE TO AGEING, PROTECTION AGAINST INGRESS OF SOLID OBJECTS AND AGAINST HARMFUL INGRESS OF WATER		N/A
13.3.2	replace the first paragraph after Figure 19 by:		N/A
	"The test wall of Figure 19 is made with bricks having smooth surfaces. When the box is mounted in the test wall, it shall fit tight against the wall, taking into account the manufacturer's instructions (for example use of sealing compound)."		N/A
16	RESISTANCE TO HEAT		N/A
16.3	Replace 16.3 by: "16.3 Void"		N/A


EN 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
IEC60670_1C ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Delete Figure 25 and replace the relevant titles by "deleted text".		N/A
17	CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH SEALING COMPOUND		N/A
	Replace the text of Clause 17 by: "Clause 17 is only applicable in the relevant Part 21 to 24 of the IEC 60670 series"		N/A
18	RESISTANCE OF INSULATING MATERIAL TO ABNORMAL HEAT AND FIRE		P
	Replace the 2 bullets by:		P
	— By the test made at 850 °C: for parts of insulating material necessary to retain current-carrying parts and/or parts of the earthing circuit in position (with the exception of parts of insulating material needed to retain the earth terminal in position in a box), and for parts of insulating material of boxes and enclosures classified according to 7.2.2.1, with the exception of parts protruding from the wall and additional and/or removable internal parts of enclosure (e.g. separator) not necessary to retain current carrying parts in position.		N/A
	By the test made at 650 °C: for parts of insulating material not necessary to retain current-carrying parts in position (even though they are in contact with them), and for parts of insulating material retaining earthing terminal in position; for parts of insulating material of boxes and enclosures classified according to 7.2.2.1, protruding from the wall and additional and/or removable internal parts of enclosure (e.g. separator) not necessary to retain current carrying parts in position."		P
Z1	ELECTROMAGNETIC FIELDS (EMF) REQUIREMENTS ADD THE FOLLOWING CLAUSE Z1:		N/A
	Add the following Clause Z1:		N/A
Z1	Electromagnetic fields (EMF) requirements		N/A
	Products covered by this standard are, in normal use, passive or the electromagnetic field generated is considered negligible. Therefore, these requirements are deemed to be met without performing any test."		N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		P
1	Norway		N/A

EN 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
IEC60670_1C ATTACHMENT			
	Replace second paragraph as follows: Boxes and enclosures complying with this standard are suitable for use at ambient temperatures not normally exceeding +40 °C, but their average over a period of 24 h does not exceed +35 °C, with a lower limit of the ambient air temperature of -45 °C. Additional requirements for boxes and enclosures suitable for use at ambient temperatures below -5 °C down to and including -45°C are given in Clause 7, 8.1, and 15.4		N/A
7	Norway		P
	Add the following new classifications:		P
7.10	The minimum temperature in use		P
	7.10.1 Boxes intended for use down to -5 °C		P
	7.10.2 Boxes intended for use from -5 °C for use down to -45 °C b		N/A
	b The lower temperature limit in use is declared by marking inside symbol IEC 60417-6292 (see 8.1, k)		N/A
8.1	Norway		N/A
	Add after j): k) the symbol IEC 60417-6292  f for boxes classified according to 7.10.2. NOTE: Temperature inside symbol indicates the minimum declared temperature in use		N/A
	United Kingdom		N/A
	Add after e): The marking of the type reference is not used.	With type reference	N/A
9	Belgium		N/A
	For boxes, there are standard sheets specified in the Belgium Standard NBN C 61-670.		N/A
	Germany		N/A
	Boxes intended to accommodate socket-outlets or switches following DIN 49200, DIN 49440-5, DIN 49445 or DIN 49447 shall comply with the standard sheets specified in the DIN 49073.		N/A
	Italy		N/A
	The dimensions of insulating flush-mounting boxes for electrical accessories shall comply with the Italian Standard CEI 23-74, when applicable.		N/A
	Spain		N/A


EN 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
IEC60670_1C ATTACHMENT			
	Boxes shall comply with the standard sheets specified in the Spanish Standard UNE 201006 when applicable. Screws are included in some of these standard sheets because screws are considered as a dimensional requirement.		N/A
	Netherlands		N/A
	Boxes shall comply with the standard sheets specified in the Netherlands Standard NEN-EN-IEC 60670-1:2021/ANL1:2021.		N/A
11.1	Denmark		N/A
	Due to the lack of an earthing conductor in many existing old buildings, boxes and enclosures requiring earth connection cannot normally be used.		N/A
12.5	Czech Republic, Netherlands, United Kingdom		N/A
	Inlets according to 7.3.3 in boxes intended to receive switches or socket-outlets have spout(s) with adequate inlet stops		N/A
12.7	Germany, Denmark		N/A
	A cable retention is required for boxes and enclosures for hollow walls due to installation practices		N/A
12.8	Norway		N/A
	Addition to 3rd paragraph:		N/A
12.10	Netherlands		N/A
	Flush-type boxes shall have metal inserts and be provided with metal screws having ISO metric thread.		N/A
	United Kingdom		N/A
	With the exception of products within the scope of EN 60670-22 or EN 60670-23, boxes shall be provided with metal threads so as to ensure safety and thread-forming or thread-cutting screws shall not be used.		N/A
13.2	Germany, Norway, Denmark		N/A
	A minimum protection degree of IP30 is required for boxes and enclosures for hollow walls due to installation practices		N/A
15.4	Norway		N/A

EN 60670-1			
Clause	Requirement + Test	Result - Remark	Verdict
IEC60670_1C ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Add a 3rd bullet point after second paragraph: • Declared temperature in °C for types as classified according to 7.10.2.		N/A
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
9	Malta (Electrical Accessories Regulations, 2004)		N/A
	United Kingdom (UK Plug and Socket Safety Regulations, 1994)		N/A
	Boxes intended to accommodate socket-outlets or connection units to BS 1363 have provision for two M3.5 fixing screws at the following fixing centres, in accordance with BS 4662:		N/A
	- at centres of 60,3 mm ± 0,2 mm on the horizontal or vertical centrelines for boxes intended to accommodate 1-gang socket-outlets or connection units (mm).....:		N/A
	- at centres of 120,6 mm ± 0,3 mm on the horizontal or vertical centrelines for boxes intended to accommodate 2-gang socket-outlets or connection units (mm)		N/A
	- at centres of 180,9 mm ± 0,4 mm on the horizontal or vertical centrelines for boxes intended to accommodate 3-gang socket-outlets or connection units (mm)		N/A


Photos

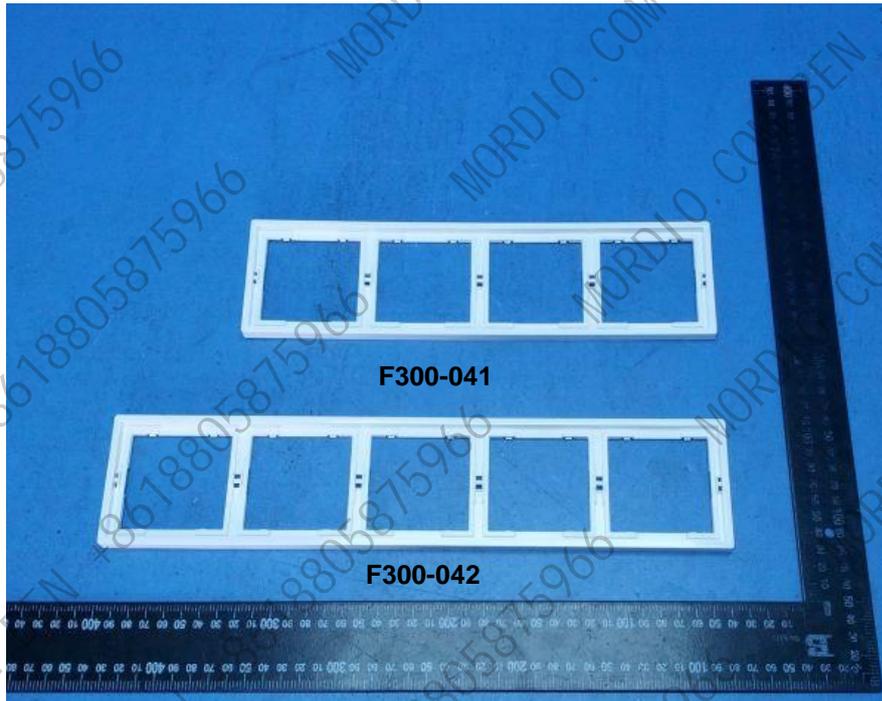


Front view

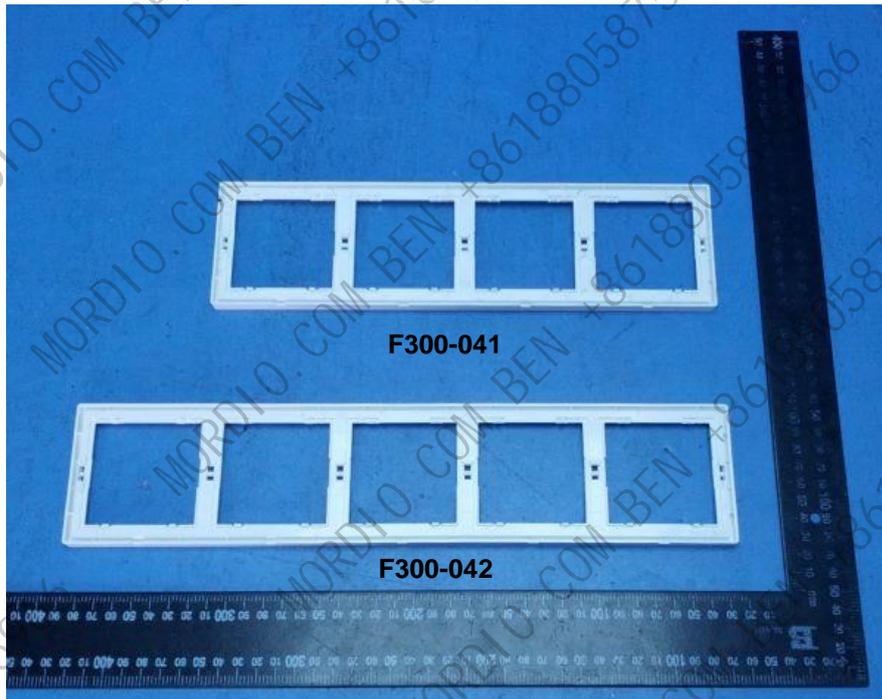


Rear view

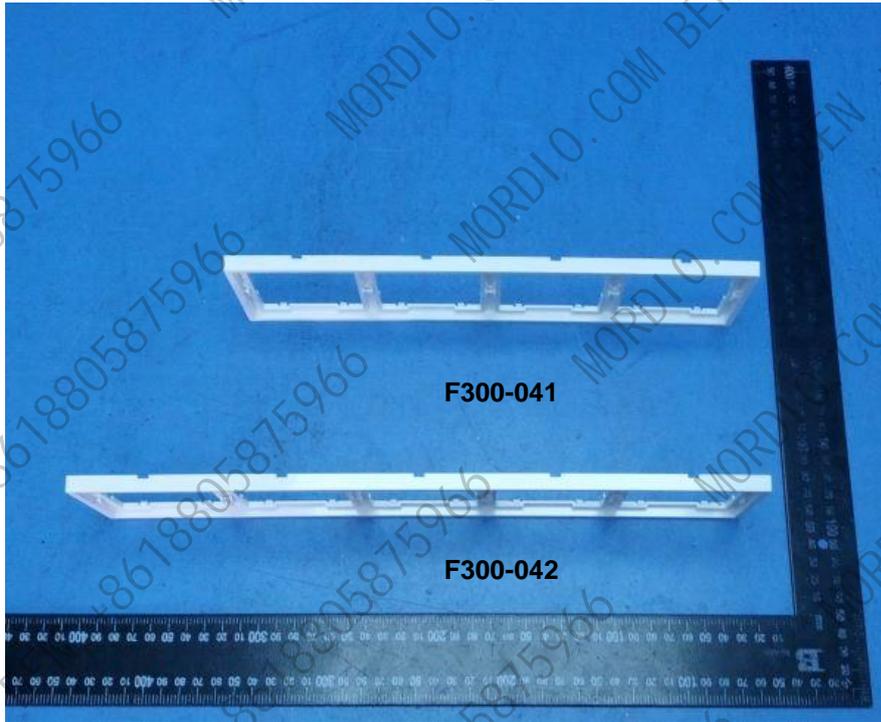


Side view

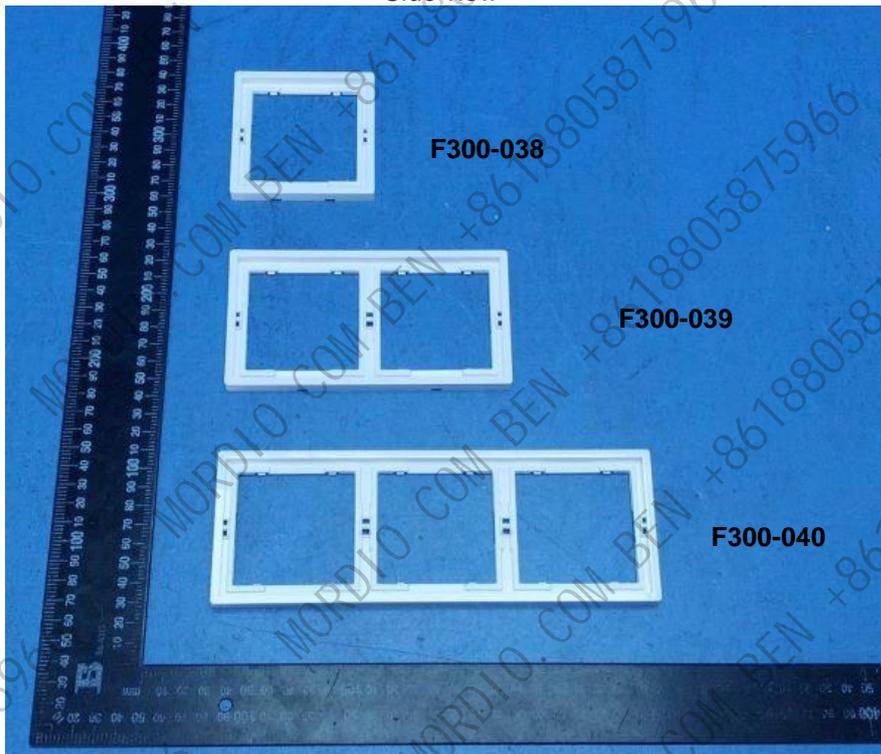

Front view

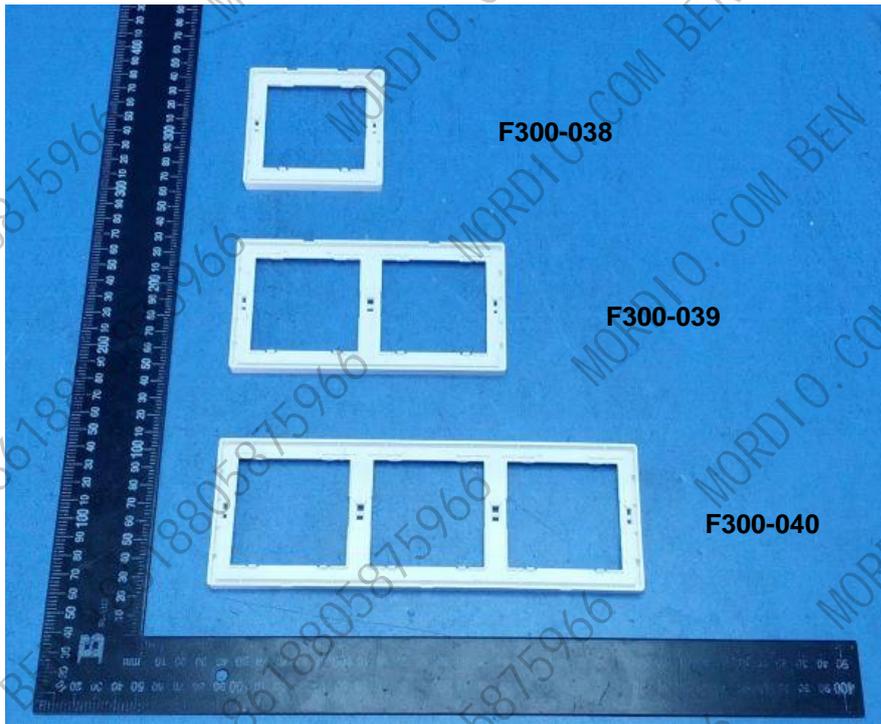

Rear view

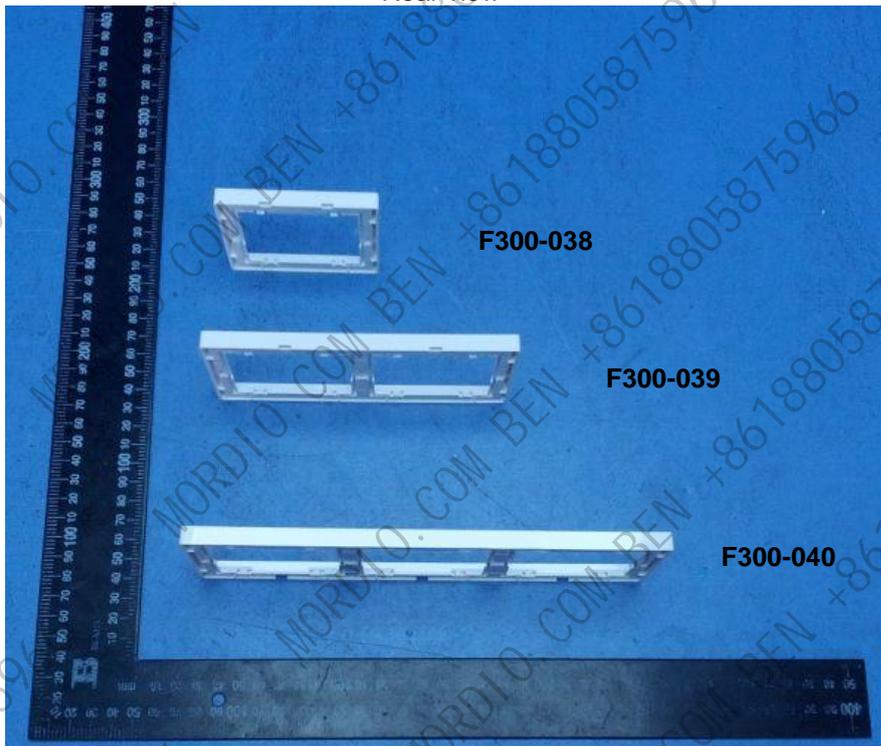

Side view